

# RELIABLE / FOUR-POST LIFTS

4P8S Storage / 4P8XLT Storage / 4P9S Storage / 4P9XLT Storage · dimensions in inches

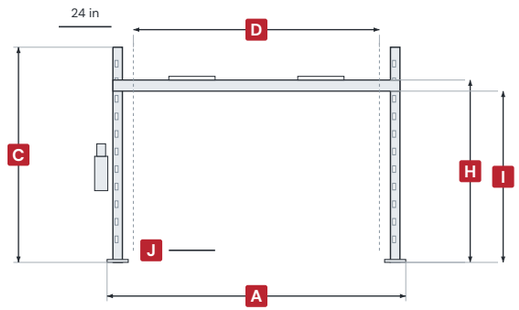


B = footprint with ramps · K = physical ramp length

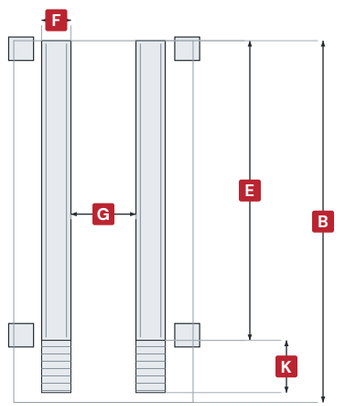


H: top of runway · I: usable clearance underneath


| Measurement · inches | 4P8S Storage | 4P8XLT Storage | 4P9S Storage | 4P9XLT Storage |
|---|---|---|---|---|
| Capacity | 8,000 lb | 8,000 lb | 9,000 lb | 9,000 lb |
| A Overall width | 106 in | 112 in | 114 in | 118 in |
| B Length with ramps | — | — | 211 1/8 in | 230 13/16 in |
| Length without ramps | — | — | 178 15/16 in | 198 9/16 in |
| C Overall height | 84 in | 91 in | 98 in | 98 in |
| D Drive-through clearance | 93 in | 99 in | 93 in | 98 in |
| E Runway length | 165 in | 180 in | 169 in | 189 in |
| F Runway width, each | 18 1/2 in | 18 1/2 in | 18 11/16 in | 20 in |
| G Inside runway gap | 38 in | 38 in | 37 5/8 in | 38 in |
| H Max. runway-top height | 72 in | 82 in | 86 in | 86 in |
| I Clearance below runway | 66 in | 77 in | 81 in | 81 in |
| J Minimum runway height | 4 5/8 in | 4 5/8 in | 5 1/8 in | 5 1/8 in |
| K Approach ramp length | 36 in | 36 in | 36 13/16 in | 36 13/16 in |
| Electrical supply | 110V · single phase | 110V · single phase | 110V · single phase | 110V · single phase |
| Time to full rise | 40 sec | 40 sec | 50 sec | 50 sec |
| Safety-lock release | Manual single-point safety-lock release handle | Manual single-point safety-lock release handle | Manual single-point safety-lock lever | Manual single-point safety-lock lever |


Runway length is not a rated wheelbase limit. Tire placement, load balance, door path and both vehicle heights require a separate check. Supplier-listed parts coverage is 3 years; confirm Reliable order coverage. Installation follows the supplied manual and nameplate. 4P8S / 4P8XLT: upgraded approach ramps are listed, but their complete ramp-inclusive footprint needs confirmation. No guessed totals are shown. — = unconfirmed or unpublished for that field. Model pages and installation manuals carry the detailed configuration notes.

Shared key: front 4P10S; plan / side 4P11S.


# RELIABLE / FOUR-POST LIFTS

4P10S Storage / 4P11S Storage / 4P9D Double Parking / 4P11A Alignment · dimensions in inches

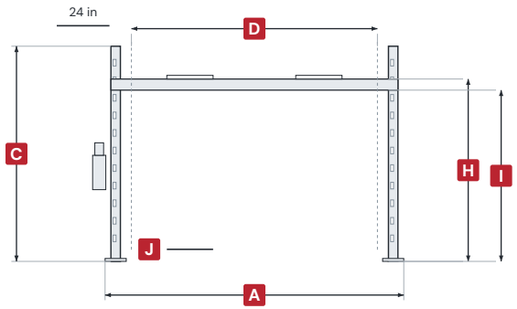

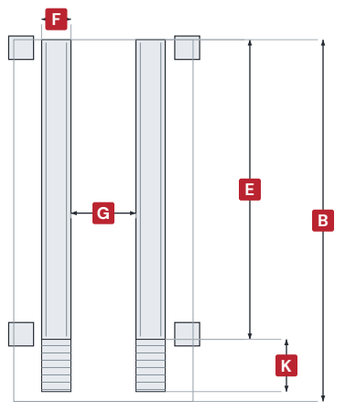
B = footprint with ramps · K = physical ramp length

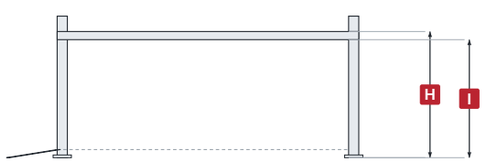


H: top of runway · I: usable clearance underneath

| Measurement · inches | 4P10S Storage | 4P11S Storage | 4P9D Double Parking | 4P11A Alignment |
|---|---|---|---|---|
| Capacity | 10,000 lb | 11,000 lb | 9,000 lb total | 11,000 lb |
| A Overall width | 136 in | 122 7/16 in | 210 in | 130 in |
| B Length with ramps | — | 247 1/8 in | 230 in | ≈ 229.33 in |
| Length without ramps | — | 217 5/8 in | 194 in | ≈ 205.12 in |
| C Overall height | 98 in | 99 15/32 in | 96 in | 87 1/2 in |
| D Drive-through clearance | 112 in | 112 in | 93 in per lane | — |
| E Runway length | 192 15/16 in | 204 23/32 in | 184 in | 196 in |
| F Runway width, each | 21 1/16 in | 20 in | 19 in | 23 in |
| G Inside runway gap | 37 5/8 in | 44 13/32 in | 37 3/8 in | 34 1/2 in |
| H Max. runway-top height | 83 1/16 in | 88 21/32 in | 82 in | 72 in |
| I Clearance below runway | 78 in | 82 15/16 in | 74 in | 67 in |
| J Minimum runway height | 5 1/2 in | 5 23/32 in | ≈ 5.51 in | ≈ 7.09 in |
| K Approach ramp length | 36 7/16 in | 35 23/32 in | 36 in | — |
| Electrical supply | 110V · single phase | 220V · single phase | 110V · single phase | 220V · single phase |
| Time to full rise | 80 sec | 90 sec | 50 sec | 60 sec |
| Safety-lock release | Manual single-point safety-lock release handle | Manual single-point safety-lock release handle | Manual single-point safety-lock release rod handle | Air-operated pneumatic safety-lock release |

Runway length is not a rated wheelbase limit. Tire placement, load balance, door path and both vehicle heights require a separate check. Supplier-listed parts coverage is 3 years; confirm Reliable order coverage. Installation follows the supplied manual and nameplate. 4P9D Double Parking: 9,000 lb is the total rating for two adjacent decks, not per deck. Confirm the permitted vehicle load split. 4P10S: supplier availability is on request. The listed 234 in overall length has an unconfirmed ramp basis; this value is not presented as a verified with/without-ramp footprint. 4P11A: the US listing gives 72 in lifting height; the linked manual differs. Footprint values use the supplier dimension drawing. Confirm the delivered configuration. — = unconfirmed or unpublished for that field. Model pages and installation manuals carry the detailed configuration notes.

Shared key: front 4P10S; plan / side 4P11S.


# RELIABLE / FOUR-POST SETUP

Included equipment and useful accessories · check model-specific compatibility




### Air-operated 4,000 lb rolling / sliding bridge jack

Raises one end of a vehicle above the runways for wheel and brake service. Requires a compatible compressed-air supply.



### Model-matched drip trays

Helps protect a parked vehicle below from drips.

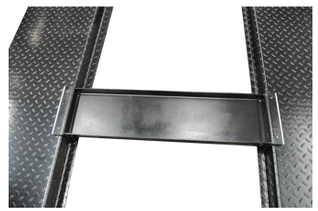

### 4,400 lb jack tray

Provides a tray between the runways for a separate suitable jack.



### Model-matched caster kit

Allows an unloaded compatible parking lift to be repositioned.

| Included package | 4P8S | 4P8XLT | 4P9S | 4P9XLT | 4P10S | 4P11S | 4P9D Double | 4P11A Alignment |
|---|---|---|---|---|---|---|---|---|
| Caster kit | Caster kit | Caster kit | Caster kit | Caster kit | Caster kit | Caster kit | Caster kit | — |
| Jack tray | Jack tray | Jack tray | Jack tray | Jack tray | Jack tray | Jack tray | 2 jack trays | — |
| Drip trays | 3 drip trays | 3 drip trays | 4 drip trays | 4 drip trays | 3 drip trays | Optional | 6 drip trays | — |
| Approach ramps | 2 ramps | 2 ramps | 2 ramps | 2 ramps | 2 ramps | 2 ramps | 4 ramps | 2 ramps |
| Rolling jack | ABJ-40 optional | ABJ-40 optional | ABJ-40 optional | ABJ-40 optional | Fit confirmation | Fit confirmation | Fit confirmation | 6,000 lb included |

ABJ-40: 4,000 lb air-operated jack, explicitly offered for 4P8S / 4P8XLT / 4P9S / 4P9XLT. Other rolling jacks need fit confirmation. Lift capacity and jack capacity are separate ratings.

Drip trays are model-size specific. The pictured standalone jack tray is verified for 4P8S / 4P8XLT and needs a separate suitable jack. Caster kits reposition an unloaded compatible lift; they are not universal kits. Alignment equipment includes turn plates and a 6,000 lb jack, whose exact standalone model is not identified.