R12 CLEAR FLOOR

HEAVY WORK. MEET HEAVY CAPACITY.

Bring 12,000 lb of lifting capacity and long three-stage arms to an open-floor service bay. Single-point lock release and included adapter sets round out the R12 Clear Floor package.



12,000 LB

RATED CAPACITY

3 / 3

FRONT / REAR ARM STAGES

3 YEARS

SUPPLIER-LISTED PARTS COVERAGE

Reliable order coverage confirmed with purchase.

Supplier full-lift configuration. Finish and labels confirmed with the order.



REACH THAT WORKS HARDER.

Extend your working reach with three-stage arms at all four lifting positions.


TRUCK ADAPTERS INCLUDED.

3 in and 6 in adapter sets included.


PREVIEW PRICE $5,169

Supplier configuration pictured. Final labels, finish, package and order terms confirmed before purchase.

R12 CLEAR FLOOR

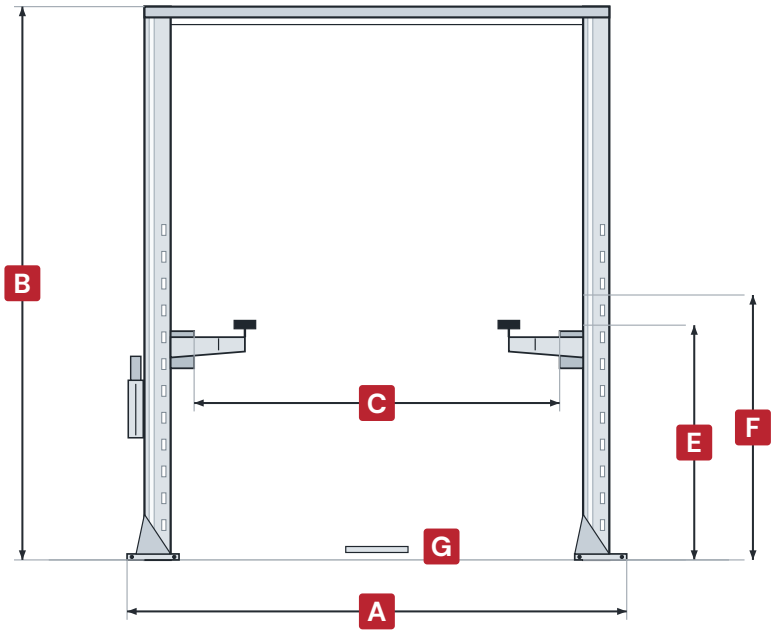

FRONT VIEW & MEASUREMENT KEY

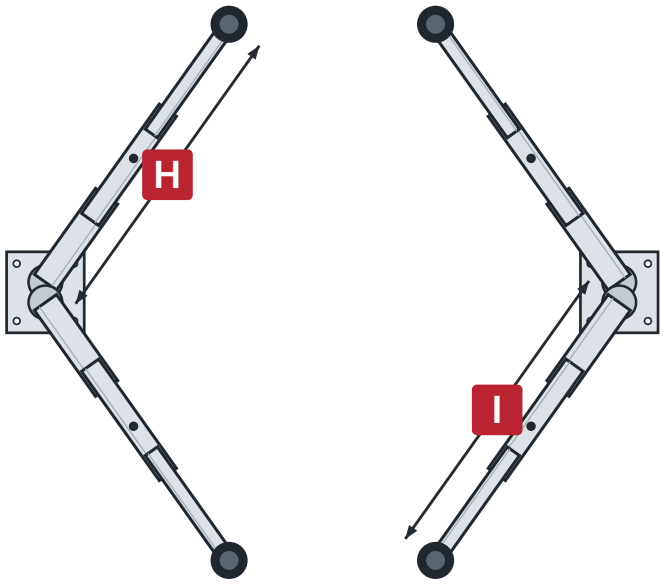

PLAN VIEW & ARM REACH

SPECIFICATION	VALUE
Capacity	12,000 lb
A Overall width	149 in
B Overall height	165 in
C Drive-through clearance	109 in
E Max. pad height, no adapters	70 in
F Max. pad height, with adapters	79 in
G Minimum pad height	4 in

SPECIFICATION	VALUE
Arm / column layout	Symmetrical arms
Arm stages · front / rear	3 / 3
H Front arm reach	37 1/2–72 3/16 in
I Rear arm reach	37 1/2–72 3/16 in
Electrical supply	220V · single phase
Safety-lock release	Single Point Release
Time to full rise	75 sec

Concrete: 6 in / 3,500 psi / reinforced (4 in for vehicles at or below 9,000 lb). Follow the supplied installation manual.

Front envelope, clearances and arm reach follow the published base configuration. Hardware widths and arm angles are representative. Final dimensions, electrical requirements and warranty coverage follow the confirmed supplied configuration.

SUPPLIER REFERENCE: AP-12SR · CLEAR FLOOR / OVERHEAD CONNECTION