R14 ASYMMETRICAL

Heavy capacity. More ways to equip your bay.

Step up to 14,000 lb of lifting capacity with symmetrical or asymmetrical installation options. Three-stage arms at all four lifting positions deliver extended reach, while adjustable screw pads provide fine contact-height control. Three-inch truck adapters are included, giving this clear-floor package more ways to meet the demands of your service lineup.



14,000 LB
RATED CAPACITY

3 / 3
FRONT / REAR ARM STAGES

3 YEARS
SUPPLIER-LISTED PARTS COVERAGE

Reliable order coverage confirmed with purchase.

Supplier full-lift configuration. Finish and labels confirmed with the order.



REACH THAT WORKS HARDER.

Three-stage arms at all four lifting positions provide extended reach and draw in for closer vehicle contact points.


TRUCK ADAPTERS INCLUDED.

Four 3 in truck adapters included. Adjustable screw pads provide fine contact-height control.


PREVIEW PRICE $5,879

Supplier configuration pictured. Final labels, finish, package and order terms confirmed before purchase.

R14 ASYMMETRICAL

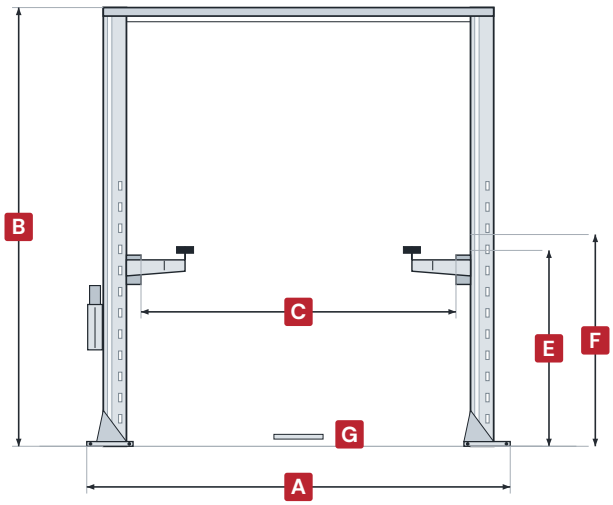

FRONT VIEW · SYMMETRICAL

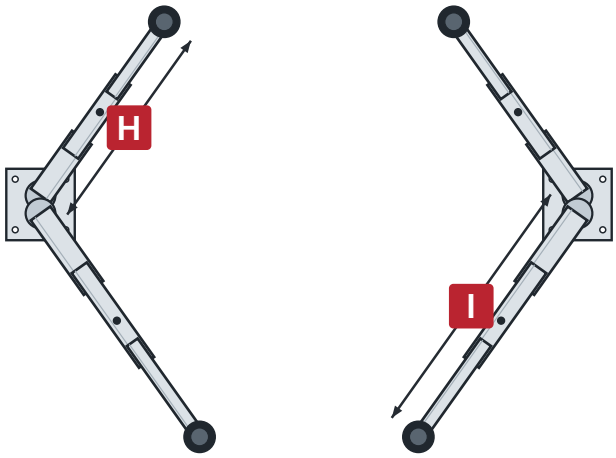

ARM REACH · SYMMETRICAL

SPECIFICATION	VALUE
Capacity	14,000 lb
B Overall height	165 3/4 in
E Max. pad height, no adapters	74 in
F Max. pad height, with adapters	80 in
G Minimum pad height	4 1/2 in
Arm stages · front / rear	3 / 3


SPECIFICATION	VALUE
H Front arm reach	29 1/2–55 1/8 in
I Rear arm reach	37 3/8–70 7/8 in
Electrical supply	220V · single phase
Safety-lock release	Single Point Release
Time to full rise	50 sec

YOUR SHOP. YOUR SETUP.

Choose either configuration during installation. The same lift gives you two ways to equip your service bay.


Symmetrical: a traditional layout with the vehicle positioned more centrally between facing columns.

SYMMETRICAL · FACING COLUMNS

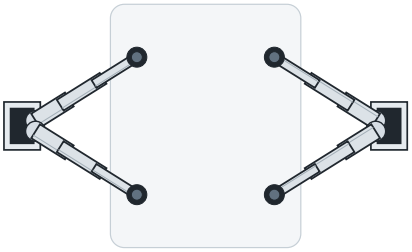

Asymmetrical: 30° column rotation permits rearward vehicle positioning for easier passenger-car door access.

ASYMMETRICAL · 30° COLUMNS

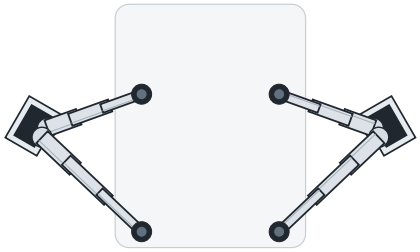

CONFIGURATION DIMENSIONS	SYMMETRICAL	ASYMMETRICAL
A Overall width	160 in	161 in
C Drive-through clearance	119 in	109 in
Inside-column spacing	130 in	120 in

Concrete: 6 in / 3,500 psi / reinforced. Follow the supplied installation manual.