R14 CLEAR FLOOR

14,000 POUNDS. BUILT FOR BUSINESS.

Get substantial lifting capacity with a straightforward overhead layout. The R14 Clear Floor pairs a 14,000 lb rating with telescoping arms, single-point lock release and two included adapter-height sets.



14,000 LB
RATED CAPACITY

2 / 2
FRONT / REAR ARM STAGES

3 YEARS
SUPPLIER-LISTED PARTS COVERAGE

Reliable order coverage confirmed with purchase.

Supplier full-lift configuration. Finish and labels confirmed with the order.



REACH THAT WORKS HARDER.

Extend your working reach with two-stage arms at all four lifting positions.


TRUCK ADAPTERS INCLUDED.

2 3/4 in and 5 1/2 in adapter sets included.


PREVIEW PRICE $5,759


Supplier configuration pictured. Final labels, finish, package and order terms confirmed before purchase.

R14 CLEAR FLOOR

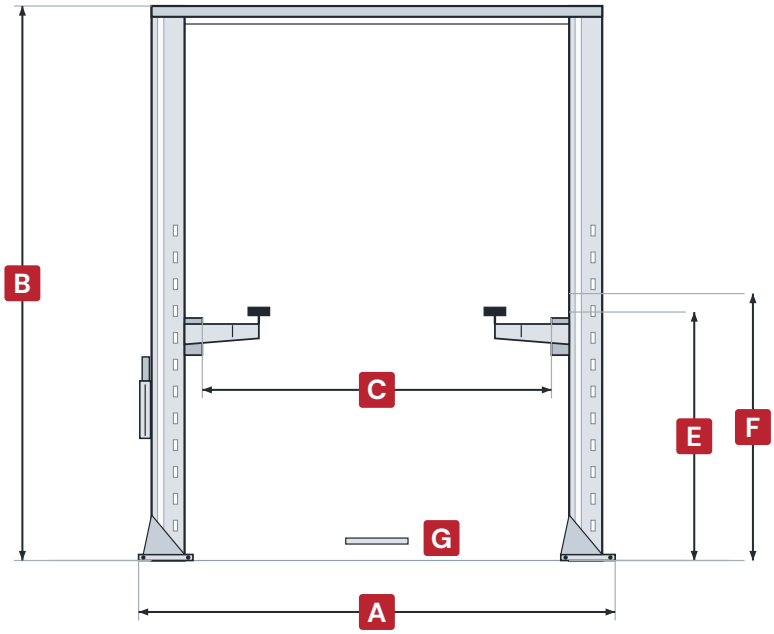

FRONT VIEW & MEASUREMENT KEY

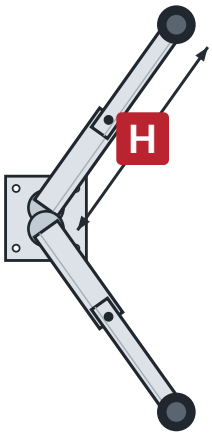

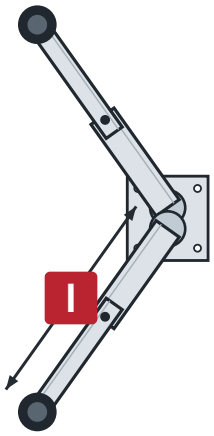

PLAN VIEW & ARM REACH

SPECIFICATION	VALUE
Capacity	14,000 lb
A Overall width	142 1/8 in
B Overall height	165 11/32 in
C Drive-through clearance	104 1/8 in
E Max. pad height, no adapters	74 3/32 in
F Max. pad height, with adapters	79 19/32 in
G Minimum pad height	6 11/16 in

Concrete: 6 in / 3,500 psi / reinforced. Follow the supplied installation manual.

SPECIFICATION	VALUE
Arm / column layout	Symmetrical arms
Arm stages · front / rear	2 / 2
H Front arm reach	32 5/32–49 7/32 in
I Rear arm reach	32 5/32–49 7/32 in
Electrical supply	220V · single phase
Safety-lock release	Single Point Release
Time to full rise	75 sec

Front envelope, clearances and arm reach follow the published base configuration. Hardware widths and arm angles are representative. Final dimensions, electrical requirements and warranty coverage follow the confirmed supplied configuration.

SUPPLIER REFERENCE: AP-14SR · CLEAR FLOOR / OVERHEAD CONNECTION